



Automatic Sounding Station Vaisala AUTOSONDE® AS41



Vaisala AUTOSONDE AS41 is an upper-air observation system for synoptic and adaptive use. With a loading capacity of 60 radiosondes, it provides the longest autonomous sounding capacity on the market.

High-quality Data

Complemented by Vaisala DigiCORA® Sounding System MW41 and the RS41 radiosonde, Vaisala AUTOSONDE AS41 provides world-class sounding data. Its automated and manual operations are based on proven algorithms and procedures, such as the automatic ground check.

As a reliable start reference for sounding data, AS41 uses either Vaisala Automatic Weather Station AWS310 installed on a 10-meter mast according to WMO requirements or Vaisala Weather Transmitter WXT536 installed on a short mast on the container roof.

High Data Availability

Each individual detail in AS41 has been carefully designed and tested to achieve high target rates of successful soundings. AS41 is designed to endure extreme weather conditions around the world. Thoroughly tested automation control and carefully selected components and materials guarantee continuous operation with minimum downtime.

Cost Efficient Solution

AS41 offers the longest autonomous sounding capacity on the market. Site visits are significantly reduced as reloading is only required once every four weeks.


As AS41 complies with tight international standards for explosive atmospheres, cost-efficient hydrogen can be used as an optional balloon filling gas in place of helium.

Easy Remote Control and Monitoring

Vaisala Observation Network Manager NM10 is used for remote control and monitoring. Connecting to AS41 through a secure communication protocol, operators can efficiently control sounding schedules, initiate on-demand soundings, and perform remote diagnostics.

Features

- Upper-air observation system for synoptic and adaptive use
- All benefits of Vaisala Radiosonde RS41 and Vaisala MW41 Sounding System
- Reloading needed only once every four weeks
- Safe working environment, gas lines located outside the container
- Balloon filling with either hydrogen or helium
- Remote control and configuration
- Easy loading and stocking
- Controlled access for improved operational safety
- User interface design supports easier system diagnostics

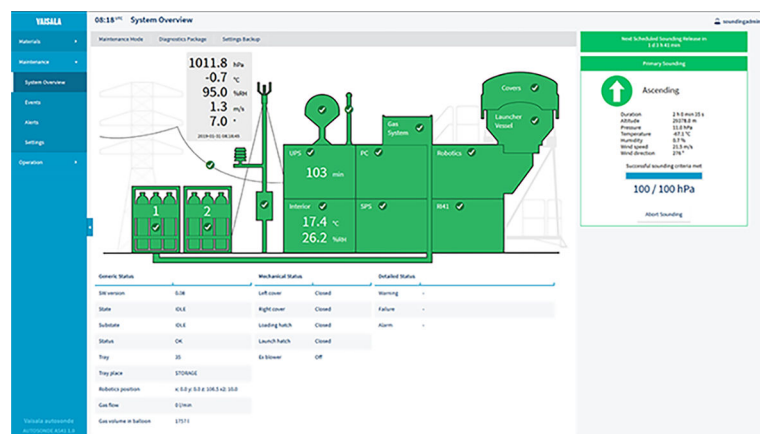

Green for Operational: AS41 Diagnostics is Supported by Visual Cues

Technical Data

Automatic Sounding Station Vaisala AUTOSONDE® AS41

Loading capacity	60 radiosondes
Storage capacity for consumables	4 months (2 soundings a day)
Radiosonde	RS41-SG, RS41-SGP
Sounding workstation	<ul style="list-style-type: none">• Sounding system software preinstalled• Operating system Windows 10 preinstalled• AUTOSONDE Control software preinstalled• System recovery tools, including USB drive with recovery image
Vaisala Sounding Processing Subsystem	SPS311G, SPS341AG
Antennas	Directional UHF antenna GPS antenna
Automatic ground check device	RI41-AS41
Uninterrupted Power Supply	Options for 1 hour and 3 hours
Surface observation options	<ul style="list-style-type: none">• AWS310, sensors on separate 10-meter mast, complies with WMO CIMO guide 8• WXT536, sensors on short mast attached to the container

Remote Server

Vaisala Observation Network Manager software NM10	Preinstalled
Operating system	Windows 10 preinstalled
System recovery tools	Including USB drive with recovery image

Electrical Specifications

Main electric cabinet	Located inside the container. Includes surge arresters, circuit breakers, residual current devices, mechanics controller, safety controller, servo drives, and frequency controllers.
Mechanics controller	Industry standard programmable logic controller with analog and digital I/O and electric motor controls.
Input power	230/400 VAC 50 Hz 20 A, 3-phase 230 VAC 50 Hz 60 A, 1-phase
Max. power consumption	6500 W
Average power consumption	Under 1000 W
Cabling	Halogen-free
Wall sockets	Integrated in the operator desk
Lights	Ceiling light with presence detector Remotely controlled robotics room lights
Heater	1000 W with thermostat
Air conditioner with heating functionality	2000 W
UPS	Capacity for completing one ongoing sounding

Mechanical Specifications

Container	
Dimensions during transportation (L × W × H)	6058 × 2438 × 2896 mm Transports as CSC-approved 20-foot HC sea container.
Dimensions during operational use (L × W × H)	7800 × 3300 × 5100 mm
Dimensions of access door with window (L × H)	900 × 2100 mm
Total weight with launcher vessel	7.5 t
Launcher vessel	
Vessel tube dimensions	Ø 2 m
Vessel tube material	Acid-proof steel frame Separate from the container
Covers	2 pieces, operated by electric gearmotors
Cover dimensions	Ø 2 m, inside
Cover material	Laminated fiberglass
Gas flow measurement	
Gas flow measurement unit	<ul style="list-style-type: none">• Installed on the container roof• 2 flexible input gas hoses controlled by magnetic gas valves• Connection to gas regulator• Output hose to nozzle controlled by magnetic valves
Gas flow meter	With electrical current output Maintenance-free, no moving parts Automatic measurement of gas amount
Balloon	
Balloon size	200 ... 1200 g
Balloon filling gas	Hydrogen or helium
Nozzle	Connected to the balloon during loading. Gas-proof connection

Operating Environment

Operating temperature	-40 °C ... +53 °C
Operating humidity	0 ... 100 %RH, condensing
Max. operating wind speed	25 m/s
Surviving wind speed	60 m/s
Storage temperature	-40 °C ... +53 °C
Storage humidity	0 ... 100 %RH, condensing

Compliance

Explosive atmospheres Part 14: Electrical installations design, selection and erection	IEC 60079-14 (2013), IEC 60079-10-1 (2015)
Machine safety	Machinery Directive 2006/42/EC



VAISALA

www.vaisala.com

Published by Vaisala | B211636EN-B © Vaisala 2019

All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. Any reproduction, transfer, distribution or storage of information contained in this document is strictly prohibited. All specifications – technical included – are subject to change without notice.