



## CAB100 Cabinets

For Data Collection in Cleanrooms & Industrial Settings



### Features

- Measurement options include differential pressure and analog inputs for a variety of parameters
- Analog inputs can be made intrinsically safe with a safety barrier or galvanic isolator
- Reporting via viewLinc is compliant with FDA, Annex 11, GxP, and GAMP
- Networking options include PoE and/or a multiport Ethernet adapter
- Large cabinets feature an integrated 24 VDC / 2.5 A power supply
- Small cabinets have the option of integrated power supply, or Power over Ethernet

The CAB100 integrates Vaisala's world-class instruments for monitoring differential pressure and other parameters into a simple, pre-configured instrument panel. In combination with the Vaisala viewLinc Enterprise Server Software, the cabinet provides pre-installed real-time monitoring of your critical environments.

### Easy Data Collection with Quality & Compliance

Cabinets are configurable to your application requirements, with options for differential pressure transmitters, analog inputs for the connection of remote transmitters, and safety barriers to limit voltage in hazardous areas that require Intrinsically Safe devices. The CAB100 enables you to combine differential pressure and other transmitters with data loggers in a single enclosure for centralized monitoring and reliable alarming.

### Configured for Your Cleanroom

The CAB100 is designed to ensure regulatory compliance in multiple cleanroom applications, including: pharmaceutical, healthcare,

biotechnology, medical device, aerospace, automotive, and semiconductor manufacturing.

Select from two cabinet sizes: small and large. Small cabinets can contain up to four analog inputs which can also be intrinsically safe, or four differential pressure transmitters. Large cabinets can accommodate up to 12 differential pressure transmitters and up to 32 analog input channels with intrinsically safe options.

Communication is achieved over Ethernet to the viewLinc server database. The CAB100 is an ideal solution for many monitoring applications, providing device protection, economy and serviceability.

The lockable metal enclosure protects the measurement instruments from tampering and accidental damage.


It is often impossible or impractical to run power or network cables to each desired point of measurement. With the CAB100 you can centralize and economize by running a single power and network cable to the cabinet to support numerous transmitters, while also reducing the number of network adapters needed.

Centralization of measurement devices also simplifies serviceability. With multiple transmitters and data loggers located together, regular maintenance activities like calibration are easy and efficient.

## CAB100 Configuration Options

<b>Cabinet Size</b>	Small (model CAB100A)	400 x 300 x 200 mm (15.75 x 11.81 x 7.87 in)
	Large (model CAB100B)	600 x 500 x 200 mm (23.62 x 19.69 x 7.87 in)
<b>Power</b>	Power supply	Within cabinet: 24 VDC / 2.5 A To cabinet: 110 ... 240 VAC
	Power over Ethernet <sup>1)</sup>	Power over Ethernet, with loop power, without fan
<b>Analog Channels</b>	4 ... 32 channels	4 ... 20 mA
<b>Safety Barrier</b>	1 ... 16 pieces	1 barrier per channel
<b>Galvanic Isolator</b>	1 ... 12 pieces	1 isolator per channel
<b>Differential Pressure</b>	1 ... 12 pieces	±60 Pa or ±0.25 in H <sub>2</sub> O
<b>Ethernet Communication</b>	Large cabinet	Up to 2 serial-to-Ethernet devices via RJ-45 (DIGI PortServer TS4)
	Small cabinet	Vaisala vNet Ethernet interface for DL series data loggers with PoE option via RJ-45 connector
<b>Ethernet</b>	Ethernet switch	+4 PoE IEEE 802.3af/at
<b>Standards</b>	EN/IEC61326-1 (Basic electromagnetic environment)	EN55032 Class B IEC/UL/EN 61010-1 IP66/NEMA 4 (large CAB100) / IP54 (small CAB100) Safety listed in USA and Canada <sup>2)</sup>

- 1) Only with PDTs and small CAB100  
2) Safety listing pending (as of May 2019)

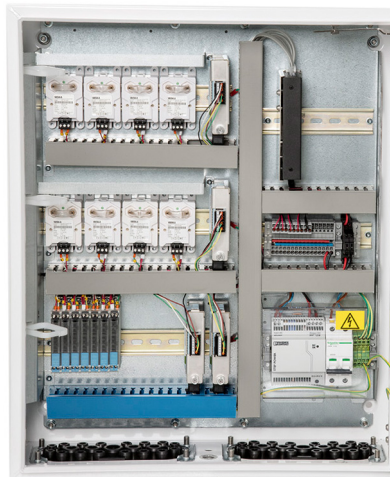

For accuracy specifications, see devices on [www.vaisala.com](http://www.vaisala.com)

- DL4000 data loggers for multiple parameters
- PDT101 differential pressure transmitter
- HMT360 series transmitters for intrinsically safe temperature and humidity measurement
- HMT120/130 series transmitters analog inputs

The CAB100 supports internal differential pressure transmitters, analog inputs, and safety barriers or galvanic isolators.

**VAISALA**

[www.vaisala.com](http://www.vaisala.com)

Published by Vaisala | B211806EN-A © Vaisala 2019

All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. Any reproduction, transfer, distribution or storage of information contained in this document is strictly prohibited. All specifications – technical included – are subject to change without notice.