

# WindCube Nacelle

## Long-range power performance testing



### Key Benefits

#### Enables quick and accurate PPT

WindCube Nacelle provides rapid data completion thanks to continuous wind direction alignment, as well as reliable contractual and operational PPT according to industry best practices and the upcoming IEC standard. The lidars are regularly designated for contractual power curve verification in Turbine Supply Agreements.

#### Accurate, verified data up to 700m

The system captures wind data simultaneously at 20 measurement distances and has an extremely high correlation with IEC met mast measurements — giving wind industry stakeholders the reliable data needed to make better decisions. It is also possible to integrate third-party calibrations against IEC met mast data to further reduce PPT uncertainties.

#### Universal compatibility and ease of use

Compatible with all current and future turbine types, simple installation, lightweight components, full integration capabilities, and straightforward configuration processes ensure fast time-to-value on any wind farm.

#### Outstanding reliability and support

WindCube Nacelle's reliability in the field permits a 3-year warranty period and allows for reduced OPEX by 35% over 9 years of operation. The system's onboard diagnostics and error coding ensure rapid troubleshooting and repair.

The WindCube® Nacelle lidar enables operators to efficiently and accurately assess and verify performance to ensure maximum power output. It is widely accepted for contractual and operational power performance testing (PPT) and has been proven to dramatically reduce operational cost while increasing efficiency. Suitable for any turbine type and rotor diameter, WindCube Nacelle's enhanced measurement range provides a complete picture of the wind profile — with accuracy and reliability as good as or better than met masts.

With an unprecedented range of up to 700 meters, WindCube Nacelle is the only lidar on the market to reach such distances — both onshore and offshore — and meet the PPT requirements for any current and future wind turbine. Over 300 WindCube Nacelle lidars are deployed worldwide, on 100+ wind turbine models onshore and offshore.

The system's ease of deployment, universal compatibility, and simple structure make it non-intrusive and easy to integrate into existing wind energy operations.



# WindCube Nacelle at a glance

## Applications

- PPT
- Warranty power curve
- Yaw misalignment correction
- Nacelle transfer function calibration



## Key features

Two configurations available: one for temporary deployment and one for full manufacturer integration

Precise data outputs with different installation set-ups available: 4-beam and 2-beam mode — allowing for accurate measurements of wind speed, relative wind direction, shear and veer, and turbulence intensity

Powerful data analytics software that includes PPT, annual energy production (AEP), and uncertainties calculations — substantially simplifying PPT analyses

Constant accuracy from 50 to up to 700 meters with 20 configurable measurement distances

Straightforward installation with lightweight system parts, an embedded leveling and alignment system, and full integration capabilities

## WindCube Nacelle specifications

	IEC-grade PPT
<b>Lidar type</b>	Pulsed lidar technology
<b>Range</b>	50m to 700m
<b>Beams configuration</b>	4 beams: Horizontal opening: 30° Vertical opening: 10°
<b>Measuring distances</b>	20 user-defined distances simultaneously
<b>Output data</b>	1s raw data 10min averaged reconstructed wind data (speed, direction, shear, veer, turbulence, yaw misalignment)
<b>Speed accuracy</b>	0.1m/s (10min averaged)
<b>Environment</b>	Housing classification IP66 (OH) / IP65 (PU) Splash water and marine environment resistant Operating humidity 0 to 100% RH
<b>Communication</b>	Ethernet (RJ45), CAN Bus (DB9), Peripheral (USB, HDMI, RS232), optional 3G modem
<b>Time synchronization</b>	NTP/SNTP, GPS or local system clock
<b>Temperature range</b>	Operational range: -40°C/-40°F to +60°C/+140°F
<b>Power consumption</b>	200 W max
<b>Weight and size</b>	OH: 24.6kg / L x W x H = 53cm x 38cm x 36cm PU: 12.8kg / L x W x H = 50cm x 13cm x 38cm
<b>Compliance</b>	CE




# WindCube Insights — Analytics

## Robust power performance testing and analysis

Engineered specifically to support WindCube Nacelle, WindCube Insights — Analytics allows operators to perform quick, simple, and transparent PPT, with IEC-compliant filtering, AEP calculation, and uncertainties reporting. By simplifying data handling activities, users are free to focus on the most essential performance analysis and optimization work.

Since PPT is a very strict process, this tool provides users with transparent validations and even lists which IEC standards are relevant while in use. It allows for the upload of WindCube Nacelle and SCADA data with a simplified data synchronization process, and a variety of standardized lidar and turbine data filters are available and fully configurable to prepare the data set.

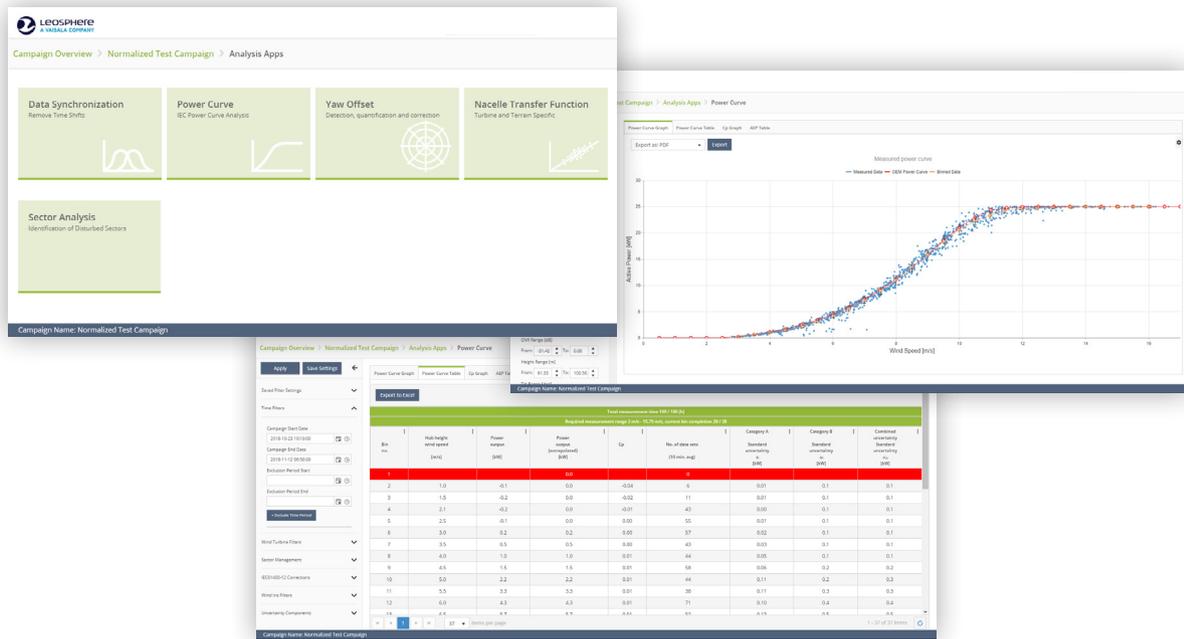

## Key Benefits

### Easy-to-use, affordable PPT analytics

WindCube Insights — Analytics is tailored for power performance calculations and data integrations — capabilities that turbine users have traditionally needed to develop in-house, often at great cost.

### Adheres to accepted industry best practices

Backed by rigorous, transparent validations, the tool proactively displays which IEC paragraph/standard it is referring to while in use.

### Improved data visibility and value for the whole wind farm

With its simple interface and rigorous analyses, WindCube Insights — Analytics gives users outstanding awareness of their systems, simple exporting of report tables, data-driven decision-making, and better-functioning wind farms.



## Applications


- Operational and contractual PPT
- AEP calculations
- Turbine performance validation during project development
- In-depth analysis of turbine failures and under-performances due to specific wind conditions like shear, veer, turbulences, or misalignment
- Yaw offset determination
- Nacelle transfer function calibration

## Key features

Outstanding data analysis and reporting capabilities that integrate both lidar and turbine data (including time synchronization) for calculations as accurate as what can be achieved using met masts

Out-of-the-box simplicity including standardized lidar and turbine data filters, simple configurability, and clear power curve analytics

Easy-to-use, cloud-based tool that can be installed and used quickly and easily, without the intense training usually needed to manage PPT

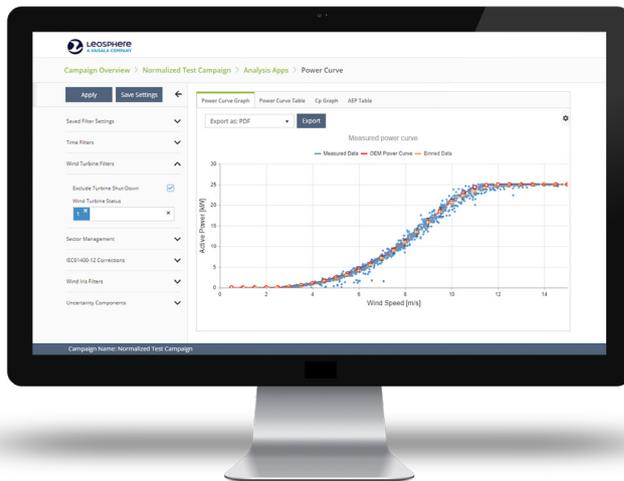

## Why Leosphere, A Vaisala Company?

Leosphere WindCube lidars are the most widely used solutions in wind energy. Trusted by developers, operators, manufacturers, service providers, and many more stakeholders, they provide the reliable data and business outcomes companies need to thrive. Thousands of WindCube units are in service around the globe with some of the world's largest wind energy clients, as well as plenty of smaller, emerging ones.

## Support and services you can count on

Wind energy isn't just about technology. It's about having the backing of a global partner that can directly support your business end-to-end, with complementary services, robust customer service, and consultation. Today, WindCube lidar technology is also backed by 80 years of experience and worldwide services.



[www.windcubelidar.com](http://www.windcubelidar.com)



Scan the code for more information

Ref. B211908EN-C ©Vaisala 2020

This material is subject to copyright protection, with all copyrights retained by Vaisala and its individual partners. All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of Vaisala is strictly prohibited. All specifications — technical included — are subject to change without notice.