


CERTIFICATE OF CALIBRATION no K008-SAMPLE

Customer	Name Addr1 Addr2 Country
Item	PTU Transmitter Pressure calibrated from 500 to 1100 hPa Temperature calibrated from 0,0 to + 39,9 °C Humidity calibrated from 10 to 90 %rh at + 23 °C
Manufacturer	Vaisala Oyj
Model	PTU301
Serial number	Mxxxxxxx
Calibration performed	From November 23 to 25, 2016
Date	November 28, 2016
Signature	 Heli Järvinen Senior Calibration Engineer
Page 1 (5)	
Documents attached	
NOTES	This is a new transmitter without before adjustment data.

This Certificate may only be reproduced in full, except with the prior written permission by the issuing Laboratory. The measurements carried out and the Certificates of Calibration issued by an Accredited Calibration Laboratory comply with the measurement ranges and uncertainties approved by FINAS Finnish Accreditation Service. The measurement results issued by the Laboratory are traceable to national or international measurement standards. Measurement Standards Laboratory of Vaisala Oyj is a calibration laboratory K008 accredited by FINAS Finnish Accreditation Service, accreditation requirement ISO/IEC 17025. The accreditation is included in the Multilateral Agreement (EA MLA) of the European co-operation for Accreditation (EA).

CONFIGURATION

The transmitter's configuration, settings and coefficients were read from the transmitter's memory. Before measurements the transmitter was allowed to stabilize to the conditions of the laboratory for at least 1 hour with power supply switched on.

The calibration is valid only with configuration and settings:

Software	PTU300 / 5.14	P1 poly adj	OFF
Pressure	1013,25 hPa	P1 average	0
Ta	OFF	P1 meas per sec	1

REFERENCES USED DURING PRESSURE CALIBRATION

DHI PPC3 Pressure Controller/Calibrator, serial number 722

REFERENCES USED DURING TEMPERATURE CALIBRATION

Vaisala PTU200 PTU Transmitter, serial number B1720007

REFERENCES USED DURING HUMIDITY CALIBRATION

Hart 1560 Thermometer, serial number B05045

Thunder 2500 Humidity Generator, serial number 9711111

Vaisala PTB220 Pressure Transmitter, serial number Z0510016

TRACEABILITY

The measurement results are traceable to the international system of units (SI) through national metrology institutes (NIST in USA or equivalent) or accredited calibration laboratories.

UNCERTAINTY

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k = 2$, which for a normal distribution corresponds to a coverage probability of approximately 95 %. The standard uncertainty of measurement has been determined in accordance with EA Publication EA-4/02.

The measurement uncertainty represents the situation at the time and conditions of calibration. When using the UUC at different conditions and at different time the effect of the conditions and stability of the UUC shall be evaluated separately.

The measurement results and uncertainty are representing the measurement points only.

CALIBRATION CONDITIONS

Temperature	23 °C ± 3 °C
Humidity	35 %rh ± 25 %rh

PRESSURE CALIBRATION

The pressure calibration was done in the Measurement Standards Laboratory (MSL) of Vaisala Oyj on November 25, 2016. The pressure readings of the transmitter were compared to the values of the reference pressure transmitter in the range from 500 to 1100 hPa absolute pressure. The pressure calibration is valid only with the LC -corrections switched ON. Pressure values were read via serial port with resolution of 0,01 hPa. The used pressure transmitting medium was air and/or nitrogen.

Measurement results

The reference and the reading values presented in table 1 are averages of ten independent observations. The results are averages of the measured two pressure cycles.

Table 1. Final results, pressure

Reference [hPa]	Reading p [hPa]	Correction [hPa]	Uncertainty [hPa]
1099,99	1099,99	0,00	± 0,04
1049,99	1049,98	+ 0,01	± 0,04
999,99	999,99	0,00	± 0,04
950,00	950,01	- 0,01	± 0,04
850,03	850,04	- 0,01	± 0,04
750,04	750,04	0,00	± 0,04
650,05	650,05	0,00	± 0,04
550,09	550,09	0,00	± 0,04
500,06	500,05	+ 0,01	± 0,04

The correction shall be added algebraically to the reading.

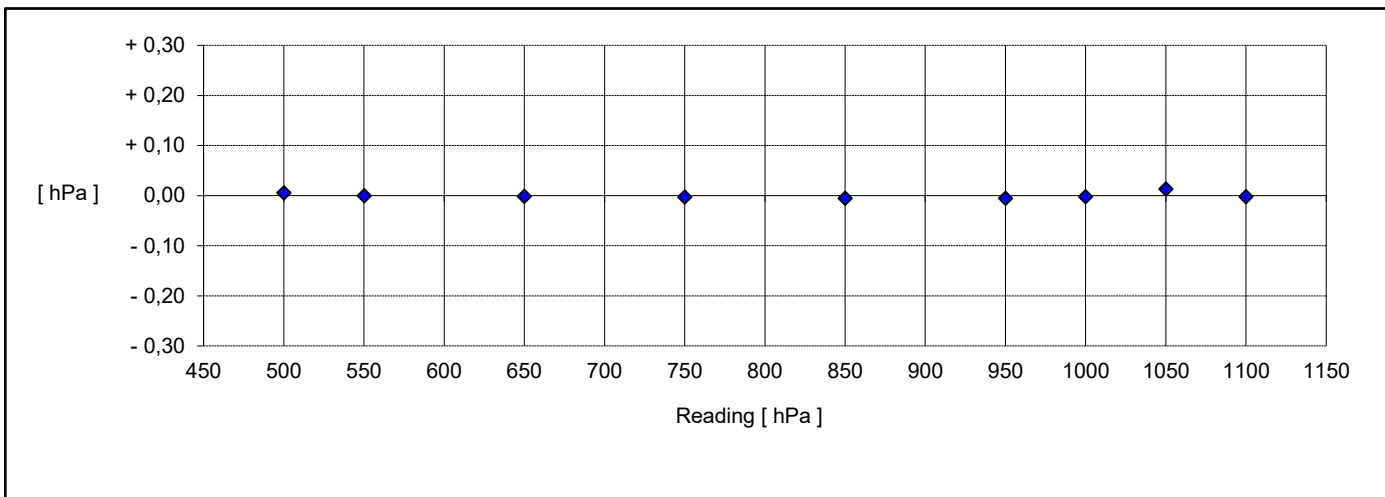


Figure 1. Final results

TEMPERATURE CALIBRATION

The temperature calibration was done in the Measurement Standards Laboratory (MSL) of Vaisala Oyj on November 23, 2016.

The temperature readings of the transmitter were compared to the values of the reference thermometer from 0,0 to + 39,9 °C in a climate chamber.

During calibration the transmitter was allowed to stabilize to the conditions of the measurement temperature for at least 30 minutes.

Temperature values were read via serial port with resolution of 0,01 °C.

Temperature values are given according to the International Temperature Scale of 1990, ITS-90.

Measurement results

The reference and the reading values are averages of ten independent observations.

Table 2. Final results, temperature, T

Reference [°C]	Reading T [°C]	Correction [°C]	Uncertainty [°C]
+ 0,04	+ 0,04	0,00	± 0,12
+ 19,94	+ 19,94	0,00	± 0,12
+ 39,95	+ 39,95	0,00	± 0,12

The correction shall be added algebraically to the reading.

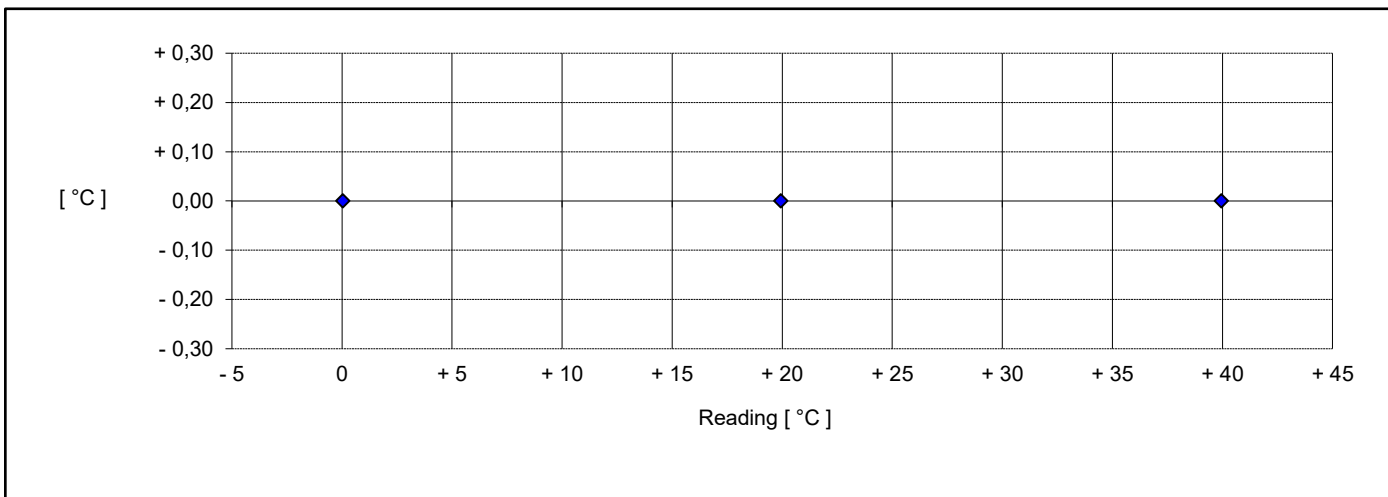


Figure 2. Final results, T

HUMIDITY CALIBRATION

The humidity calibration was done in the Measurement Standards Laboratory (MSL) of Vaisala Oyj on November 24 and 25, 2016.

The humidity readings of the transmitter were compared to the reference humidity values at climate chamber in the range from 10 to 90 %rh. The humidity readings were read via serial port with resolution of 0,01 %rh.

Measurement results

The probe was allowed to stabilize to each humidity for at least 60 minutes before the readings were read. The reference and the reading values are averages of ten independent observations.

Table 3. Final results, humidity

Temperature [°C]	Reference [%rh]	Reading RHout [%rh]	Correction [%rh]	Uncertainty [%rh]
+ 23,2	10,0	10,1	- 0,1	± 0,4
+ 23,2	30,0	29,9	+ 0,1	± 0,6
+ 23,2	50,0	50,0	0,0	± 0,7
+ 23,2	69,9	70,0	- 0,1	± 0,8
+ 23,2	80,0	80,0	0,0	± 0,9
+ 23,2	90,0	89,9	+ 0,1	± 0,9

The correction shall be added algebraically to the reading.

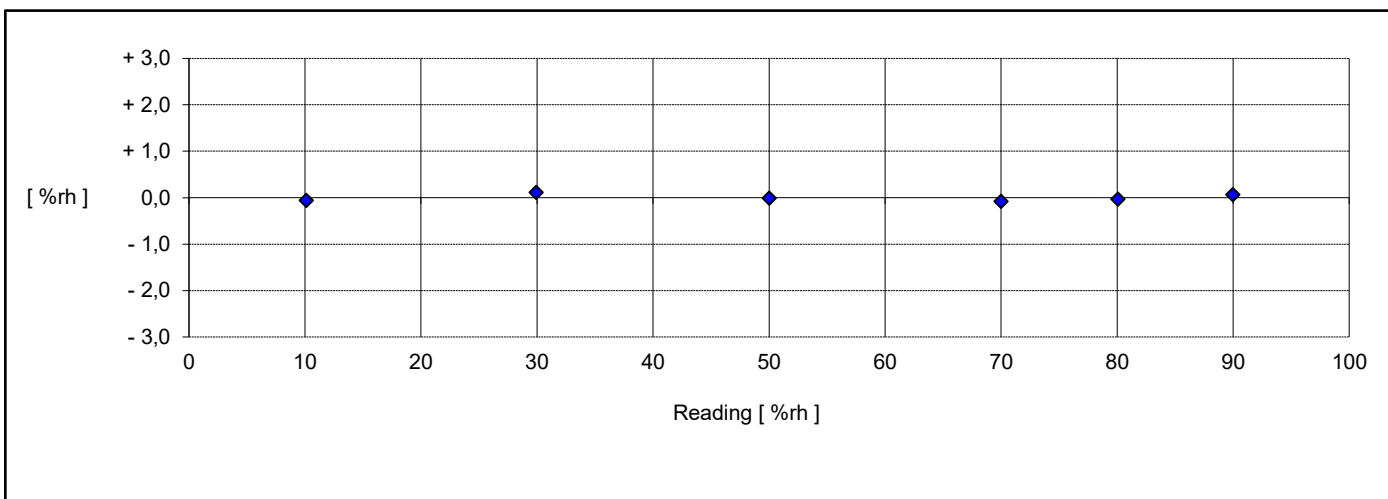


Figure 3. Final results